
Silt Density Index Testing

Portable SDI Test Assembly - direct SDI™



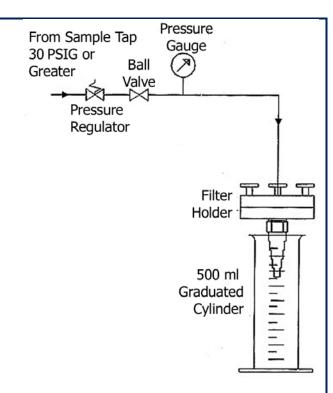

Model No. SDI-2000

Completely assembled in a portable, compact case, ready for on-site testing. Includes instructions for measuring silt density index.

Assembled with:

- Filter Holder
- Pressure Gauge
- Pressure Regulator
- Ball Valve
- Graduated Cylinder
- Thermometer
- Tubing
- Filter Tweezers

(Filters not included - sold separately. See below.)

Also Available:

 Manual SDI Kit with Millipore® brand filter holder – Model No. SDI-2000-MIL (SDI-FH Millipore filter holder is pictured below)

Optional Booster Pump Accessory:

- Pump Assembly Kit for testing with less than 30 psi. Assembled with Booster Pump, Power Supply, Pressure Regulator:
- SDI-PU: 115-120VAC, 60Hz
- **SDI-PE**: 230VAC, 50Hz
- **SDI-PJ**: 100VAC, 50-60Hz



Filters and Spare Parts for SDI Kit

Model No.	Description
SDI-045	Filters for SDI Testing, 0.45 Micron, 47 mm, Package of 100
SDI-FH2	Filter Holder for SDI Kit (SDI-2000)
SDI-FH	Filter Holder for SDI Kit (SDI-2000-MIL)







Detailed Silt Density Index measurement instructions and calculations are shown in the technical section of our catalog.

